


DATASHEET Swivel Star

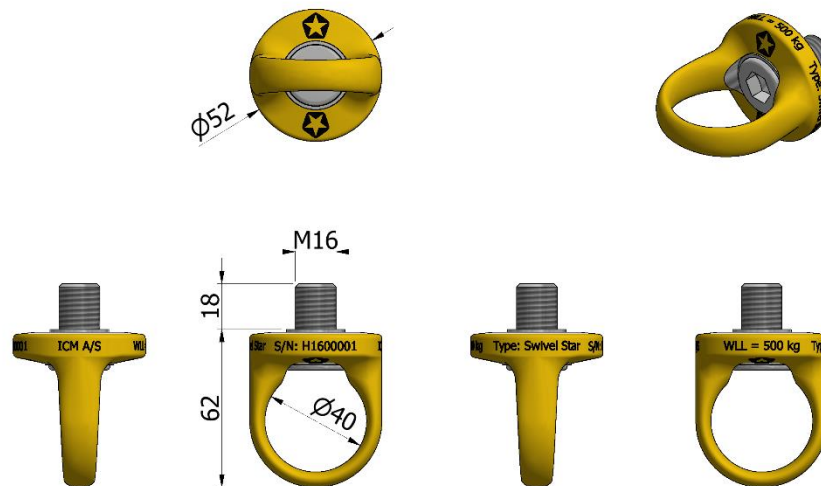

(Dimensions are indicative.)

ICM no.: 6803565

Material: AISI 316L

Drawing no.: 41490-061-100

Surface finish: RAL 1023

Description: Anchor point for fall arrest, work positioning, restraint and rescue. With swivel function.

Marking: Laser engraving

Label: Vinyl decal
Size: 100 x 60 mm

Capacity: Fall protection: 1 person,
Rescue: 2 persons.
WLL 500 kg (1 102 lbs)
MBL 44,4 kN (10 000 lbs)

Conformity: EN795:2012, type A
CEN/TS 16415:2013
ISO 14567:1999
EN 50308:2004
ANSI Z359.18-2017
OSHA 1926.502
AS/NZS 1891.4:2009

Anchor Point. Only for fall arrest, work positioning, restraint and rescue. Do not use with incompatible connectors. Avoid physical hazards such as thermal, electrical and chemical sources. Minimum service temperature -30°F (-34°C). Material: AISI 316L. Meets: EN 795:2012 Type A, CEN/TS 16415:2013, ISO 14567:1999, ANSI Z359.18-2017 Type A, OSHA 1926.502, AS/NZS 1891.4:2009. Suitable for EN 50308:2004 compliant WTGs. Capacity: 500 kg/1102 lbs. MBS: 44.4 kN/10000 lbs; WLL: 500 kg/1102 lbs. Art.No.: 6803565. Type: Swivel Star. ICM A/S, Petersmindevej 15, DK-5000 Odense C, Denmark.		
Last inspection 	S/N Year of installation Installer	Next inspection

Inspection interval: Regular inspection every 12 months (local legislation may require shorter intervals).

Important limitations: Fall protection anchor points are not for lifting! This datasheet does neither replace nor substitute the User and Installation Manual for this product.