



Nitrile +
Neoprene

Tough chemical protection unparalleled comfort

- Three layer design for superior protection against harsh chemicals including acids, solvents and bases
- Thin mil construction provides enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility for longer wear time
- Lower acceptable pinhole rate (0.65 AQL) and extended cuff for reliable protection against hazardous substances
- Silicone free formulation and processing ensure better product protection




Industries

- Aerospace
- Automotive
- Chemical
- Electronics
- Life Sciences
- Machinery and Equipment
- Metal Fabrication
- Recycling & Waste Disposal

Applications

- Blending, compounding materials
- Handling aerospace equipment & parts
- Handling of painting tools including spray guns and robots
- Handling unexpected leaks, spills or other releases
- Maintenance and equipment clean up
- Mounting & dismantling, assembly
- Petrochemicals processing
- Routine & experimental testing
- Sample taking & lab processing
- Transferring liquid & solids

Innovative 3 Layer Design*

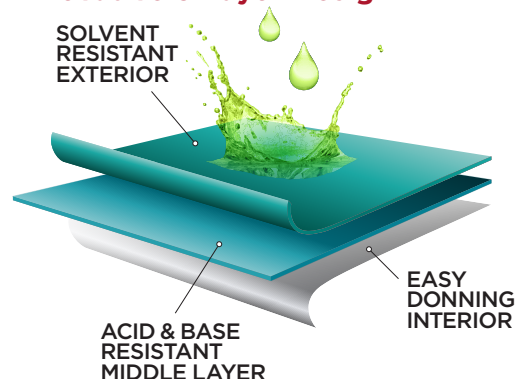

* The method used to produce this 3 layer design is patent pending.

TECHNICAL DATA SHEET:

PRODUCT INFORMATION:

	93-260
Material	Nitrile + Neoprene
Color	Green outside, blue inside
Glove Design	Ambidextrous, Powder-Free, Textured fingers, Heavy Weight Product
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001
Regulatory/Standards Compliance	COMPLIANT WITH ASTM D6977 & D6319, PPE 89/686, EN 420, 388 & 374 CATEGORY III
Packaging	50 gloves per dispenser box, 10 dispenser boxes in a shipper box
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Sri Lanka
User Needs Segment	High Risk Glove – Extended cuff gloves to provide additional protection for the wrist and forearm.

PHYSICAL PROPERTIES:

	TYPICAL VALUES						TESTING METHOD
	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL	
Length (mm/inches)	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	ASTM D3767/EN 420
Average Palm Width	78	89	98	111	116	122	
Freedom from Holes (Inspection level I)	0.65 AQL						ASTM D6319-10/ ASTM D5151-06 (2011)
Palm Thickness Single Wall	(mm : 0.198) / (mil : 7.8)						ASTM D3767/EN 420
	BEFORE AGING			AFTER AGING			
Ultimate Tensile Strength	22 Mpa			26 Mpa			ASTM D6319-10
Elongation at Break (%)	620			520			ASTM D6319-10
Force at break (N)	16			17			EN 455-2

ORDERING INFORMATION:

	SIZE	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL
93-260	REORDER NO.	93260060	93260070	93260080	93260090	93260100	93260110

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
Riverside Business Park
Blvd International, 55
1070 Brussels, Belgium
+32 2 528 74 00
+32 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
Prima 6, Prima Avenue
Block 3512, Jalan Teknokrat 6
63000 Cyberjaya
Selangor, Malaysia
T: +60 3 8310 6688
F: +60 3 8318 6699

North America Region

Ansell Healthcare Products LLC
111 Wood Avenue South,
Suite 210
Iselin, NJ 08830, USA
+1 800 800 0444
+1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial México S.A. de C.V.
Bvd. Bernardo Quintana No. 7001-C,
Q7001 Torre II.
Suites 1304, 1305 y 1306.
Col. Centro Sur, C.P. 76079
Querétaro, Gro. México
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
Level 3, 678 Victoria Street,
Richmond, Vic, 3121
Australia
+61 1800 337 041
+61 1800 803 578

Russia

Анселл РУС
123610 Россия, Москва
Краснопресненская
Наб. 12, п.3, оф. 1304А
Тел. +7 495 258 13 16

Performance Standards



Regulatory Compliance

